




TORO-IRRIGATION DIVISION  
5825 JASMINE STREET  
RIVERSIDE, CA 92504  
TOLL FREE: 1-877-345-8676  
FAX: (951) 359-1870  
www.toro.com

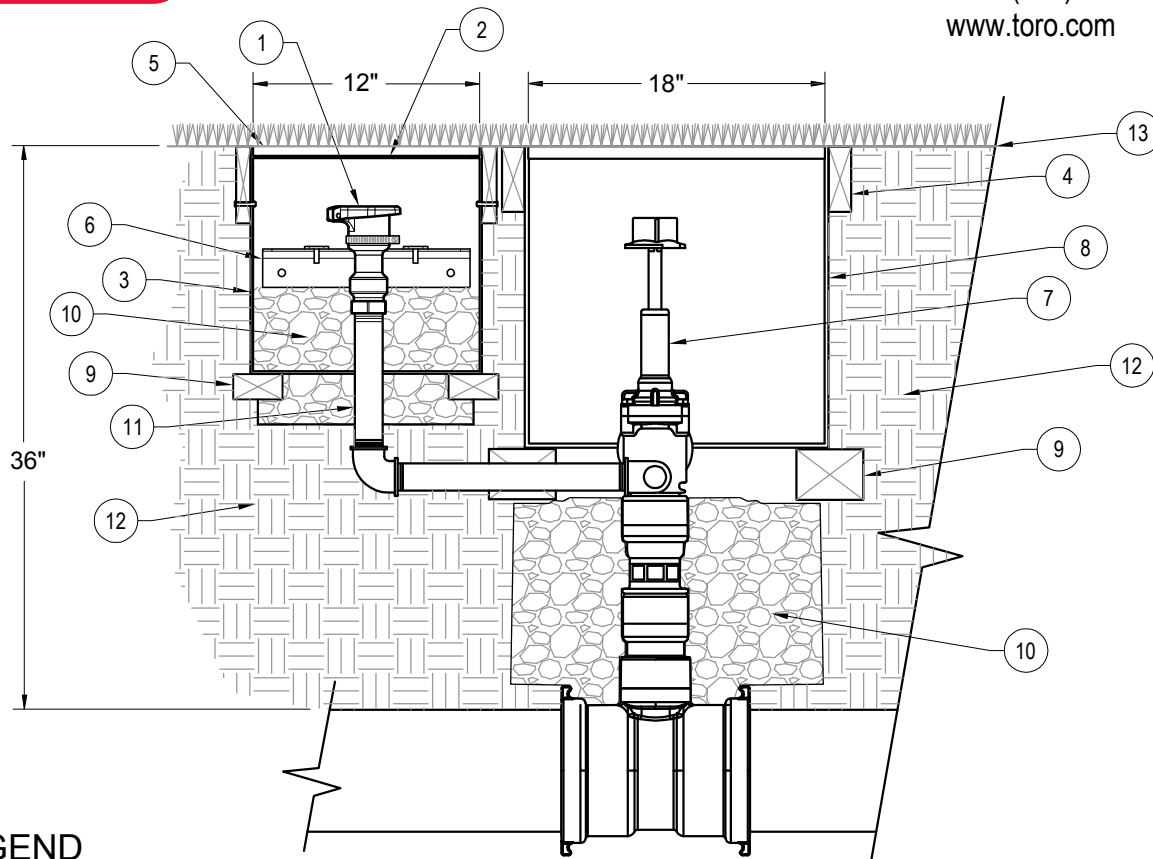

## LEGEND

- ① QUICK COUPLER VALVE - BRASS, TORO SERIES QCV
- ② QUICK COUPLER BOX LID - SCREWED DOWN - w/DRAIN HOLES (INCLUDED w/TSSB-1212-12)
- ③ QUICK COUPLER BOX - w/RECESSED LID - 12GA STAINLESS STEEL (INCLUDED w/TSSB-1212-12) WELDED CONSTRUCTION - 12" X 12" X 12".
- ④ TREX POLY WOOD - ATTACHED TO ALL FOUR SIDES OF VALVE BOX (PROVIDED BY CONTRACTOR).
- ⑤ HDPE PANEL INSERT - 1/2" THICKNESS (INCLUDED w/TSSB-1212-12).
- ⑥ HORIZONTAL STAINLESS STEEL MOUNTING BRACKET FOR STABILITY OF QUICK COUPLER VALVE (INCLUDED w/TSSB-1212-12).
- ⑦ ISOLATION VALVE w/1" PLUG FOR QVC & MALE SWIVEL.
- ⑧ TORO ENCLOSURE MODEL No. TSSBK-18-SOLID, 18"W X 18"L X 18"D, STAINLESS STEEL WITH SOLID LID AND 1/2" THICK HDPE INSERT SECURED FROM UNDERSIDE.
- ⑨ COMMON RED OR CONCRETE BRICK SUPPORT UNDER EACH CORNER OF BOX.
- ⑩ 3/4" WASHED GRAVEL BACKFILL - SET TO 6-INCHES BELOW BOX.
- ⑪ NIPPLE - LINE SIZE - LENGTH AS REQUIRED.
- ⑫ NATIVE SOIL.
- ⑬ FINISHED GRADE.

### NOTES:

1. IN GROUND ENCLOSURE TO WITHSTAND HEAVY TRAFFIC WITHOUT DEFLECTION.
2. BOX BASE INCLUDES 2.5" RETURN FOR STABILITY WITHIN SOILS.
3. ALL HARDWARE SHALL BE STAINLESS STEEL.

## TORO® QCV CONNECTION with ISOLATION VALVE

DRAWING NOT TO SCALE

REVISION DATE JAN-2019