





TORO-IRRIGATION DIVISION  
5825 JASMINE STREET  
RIVERSIDE, CA 92504  
TOLL FREE: 1-877-345-8676  
FAX: (951) 359-1870  
www.toro.com

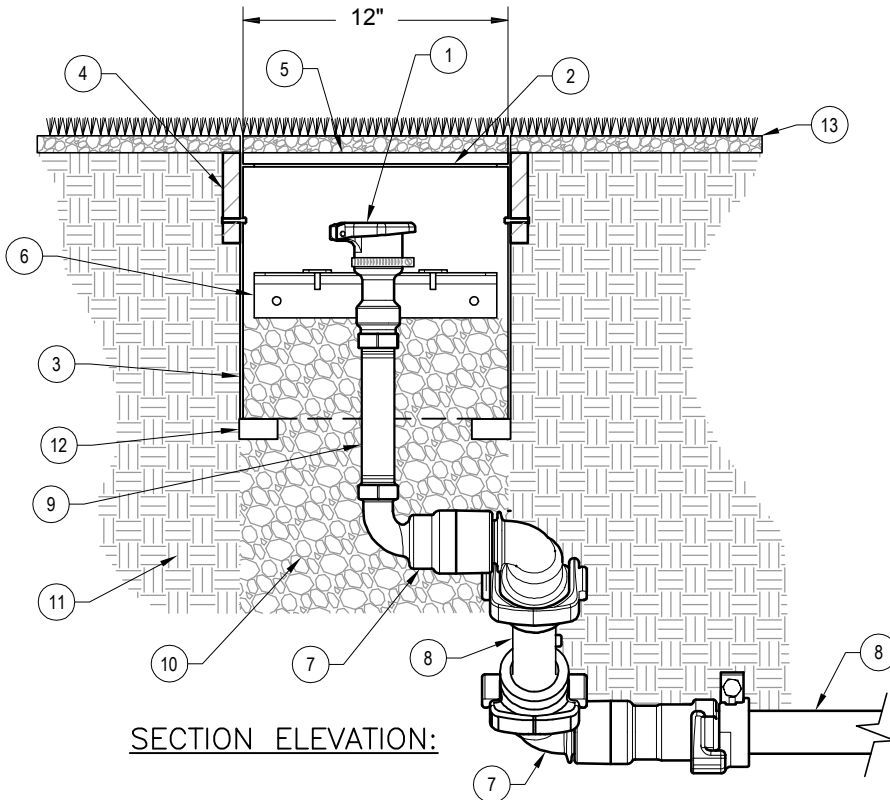

SECTION ELEVATION:

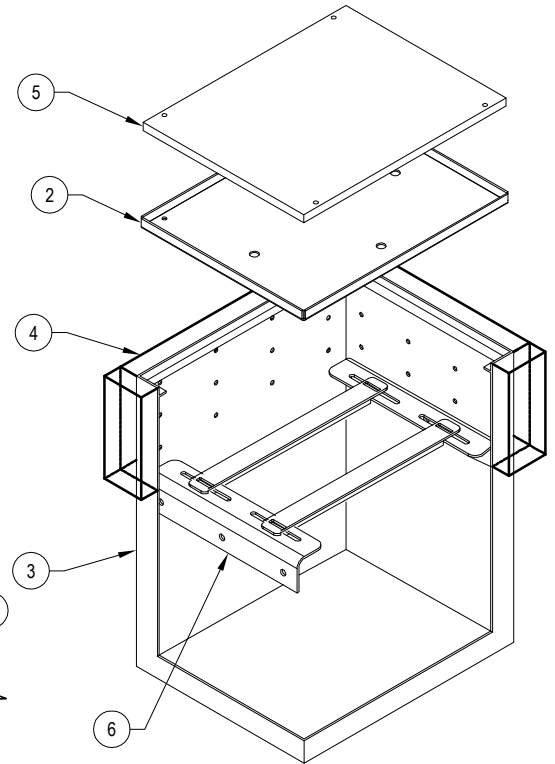

CORNER ELEVATION:

- ① QUICK COUPLER VALVE - BRASS, TORO SERIES QCV
- ② QUICK COUPLER BOX LID - SCREWED DOWN - w/DRAIN HOLES (INCLUDED w/TSSB-1212-12)
- ③ QUICK COUPLER BOX - w/RECESSED LID - 12GA STAINLESS STEEL (INCLUDED w/TSSB-1212-12) WELDED CONSTRUCTION - 12" X 12" X 12".
- ④ TREX POLY WOOD - ATTACHED TO ALL FOUR SIDES OF VALVE BOX (PROVIDED BY CONTRACTOR).
- ⑤ HDPE PANEL INSERT - 1/2" THICKNESS (INCLUDED w/TSSB-1212-12).
- ⑥ HORIZONTAL STAINLESS STEEL MOUNTING BRACKET FOR STABILITY OF QUICK COUPLER VALVE (INCLUDED w/TSSB-1212-12).
- ⑦ DUCTILE IRON SWING JOINT - 1-1/2" MODEL No. QVC-SJ-150100NDI, 1-1/2" GASKET X 1"NPT.
- ⑧ PVC PIPING - PROVIDED BY OTHERS.
- ⑨ BRASS NIPPLE - LINE SIZE - LENGTH AS REQUIRED.
- ⑩ 3/4" WASHED GRAVEL BACKFILL - SET TO 6-INCHES BELOW BOX.
- ⑪ NATIVE SOIL.
- ⑫ COMMON RED OR CONCRETE BRICK SUPPORT UNDER EACH CORNER OF BOX. TYPICAL.
- ⑬ FINISHED GRADE.

**TORO® TSSB-1212-12**

DRAWING NOT TO SCALE

REVISION DATE 9-19-2018